

## Stella Pro EnOcean

### Quick Start Guide

A5-20-01



These operating instructions will guide you through the commissioning and use of your Stella Pro EnOcean and answer all essential questions. Please read these operating instructions carefully, before using your Stella Pro EnOcean. Hand over all documents when passing on to third parties.

### Safety Information

- Before installing, removing or repairing your device, allow the radiator to cool down.
- Never carry out repairs to your device yourself and never open your device.
- Do not make any modifications or changes to your device.
- Do not use the device if it is damaged.
- Only use the specified battery type.
- Use your device in a dry and dust-free environment.
- Only use original accessories.

### Cleaning

To clean the Stella Pro EnOcean, only use a dry to slightly damp towel. Avoid chemical solvents as they may damage the device.

### Disposal

 The adjacent symbol indicates that electrical and electronic apparatus no longer required must be disposed of separate from domestic waste in accordance with legal directives. Dispose of the device at a collection point provided by your municipal waste authorities.

 Defective or spent batteries must be recycled according to Directive 2006/66/EC.

Return batteries and / or the device via the recycling services offered.

 Dispose of the packaging according to type. Dispose of cardboard and carton at waste paper collection points and foil at recyclables collection points. By recycling, material recovery or other forms of recycling, you are making an important contribution to protecting our environment.


### Proper Use

Your Stella Pro EnOcean is used to regulate a radiator valve. This makes it possible to regulate the room temperature time-controlled and via an app or webinterface. Your Stella Pro EnOcean moves a radiator valve to control the flow of heat into the radiator. Your Stella Pro EnOcean can be installed on all common radiator valves. Only use your Stella Pro EnOcean indoors.

### Scope of Delivery

- 1x Stella Pro EnOcean
- 1x Quick Start Guide
- 1x Button press tool

### Controls and Display elements

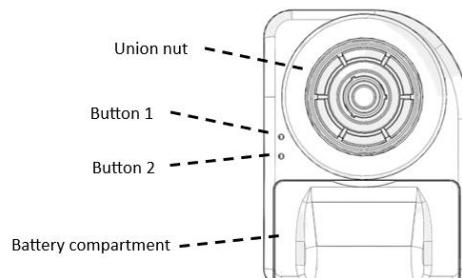

### Inserting and connecting the battery



The Stella Pro EnOcean is powered by a lithium battery (3.6 V, C cell). This is equipped with a High Load Connector (HLC).

The battery is connected to the plug in the battery compartment using the cable provided on the battery. Please ensure that the connection is correct before the device gets into use.

### Pairing Process

After inserting the battery, LED 1 flashes green quickly. The device is in pairing mode.

When the device has successfully registered with a gateway, LED 1 lights up green.

### Installation

The product can be mounted on radiator valves that have an M30 x 1.5 mm thread. For installation on valves with other mounting options, metal adapters are available on our Website [www.eurotronic.org](http://www.eurotronic.org).

### Assembly

After a successful connection, the device switches to mounting mode. The Stella Pro EnOcean can be mounted when LED 2 is slowly flashing green. After installation, press button 2 for 3 seconds. LED 2 flashes green quickly during adaptation.

**NOTE: Only start the adaptation when the device is correctly mounted on a valve.**

Adaptation is successfully completed when LED 2 does not light up red.

### Battery Replacement

When LED 3 lights up red, press button 2 for 5 seconds until LED 3 starts flashing red. This resets the battery status. Then replace the battery. **Important: You must strictly follow this sequence.**

After replacing the battery, the device must be re-adapted using button 2.

### Reset the device

To reset, press button 1 for 10 seconds until all 3 LEDs light up red. LED 1 then flashes green again quickly and the device is in pairing mode again.

### Display and button explanation

#### 1. Connection status LED 1

**Flashes green slowly:** The device is not in pairing mode and has no connection.

**Flashes green quickly:** The device is in pairing mode.

**Lights up green:** If the RF communication is active.

**LED off:** RF communication is not available.

**Flashes red quickly:** Pairing error.

**Flashes orange slowly:** Reset is in process.

#### 2. Motor status LED 2

**Flashes green slowly:** Waiting for button confirmation and the adaptation to start (ADAP-Mode).

**Flashes green quickly:** Adaptation is in process.

**Flashes red:** The device has a motor error (E1/E3).

**LED off:** Adaptation is complete, LED 2 is switched off if the following states are not affected →

**Lights up green:** The device is in position mode (Valve-Mode).

**Flashes orange quickly:** The device is in heating mode (self-regulation).

#### 3. Other status LED 3

**Lights up red:** Battery is almost empty.

**Flashes red quickly:** Battery is replaced and the battery status is updated.

**Flashes green slowly:** Window open detection active.

**LED off:** No status is active.

#### 4. Buttons

**Button 1:** Reset 10 seconds.

**Button 2:** In ADAP-Mode, press for 3 seconds to start the adaptation.

**Button 2:** When LED 3 lights up red, press for 3 seconds to set the battery status to 100%.

#### 5. Display the status of the LEDs

To display the status of the LEDs, press button 1 or 2 short.

### Error codes

Problem	Cause	Solution
<b>LED 2 flashes red (E1/E3)</b>	<ul style="list-style-type: none"> <li>Valve is not mounted, valve is not detected</li> <li>Valve is stuck or cannot move the valve</li> </ul>	<ul style="list-style-type: none"> <li>Press button 2 for 3 seconds to restart the adaption</li> <li>Make sure that your Stella Pro EnOcean is correctly mounted on the radiator</li> <li>Use the appropriate adapter</li> </ul>
<b>LED 1 flashes red quickly</b>	Pairing Error, or Pairing Timeout	Press button 1 to restart the connection process
<b>LED 1 off</b>	Is off if no RF connection	
<b>LED 3 lights up red</b>	The battery is empty	Change the battery
<b>LED 3 flashes green slowly</b>	Window open detection is on	Goes off after 10 minutes

### Technical data

Parameter	Value
<b>Supply voltage</b>	3,6 V Lithium C-Zelle
<b>Adjusting force</b>	>125 N
<b>Valve stroke</b>	4,8 mm
<b>Installation</b>	M30x1,5 mm
<b>Protection class</b>	IP 30
<b>Communication</b>	EnOcean (IEC 14543-3-10)
<b>Frequency band</b>	868 MHz – Europe and China 902 MHz – North America (on request) 928 MHz – Japan (on request)
<b>EEP</b>	A5-20-01

### Simplified Declaration of Conformity



EUROTronic Technology GmbH hereby declares that your Stella Pro EnOcean complies with all applicable Community provisions of the European Economic Area Directive 2014/53/EU. The entire text of the EU Declaration of Conformity is available at the following Internet address: <https://eurotronic.org/service/downloads>

### Manufacturer

Eurotronic Technology GmbH  
Südweg 1  
36396 Steinau-Ulmbach  
Germany  
[www.eurotronic.org](http://www.eurotronic.org)